

Tosoh Result Integrity • Multi-Tasking Efficiency







# Four Configurations Provide Expansion Capabilities

# **Features:**

- 90 tests/hour throughput
- First result in ~ 18 minutes
- Random access / Continuous processing
- 90 day calibration for most assays
- Simple touch screen operation
- Bar-coded primary tube sampling
- Clot detection
- Automated pretreatment
- Automated dilution from 2 to 1000



**AIA-900** Benchtop



**AIA-900** Loader Model



**AIA-900** with 9 Tray Sorter



**AIA-900** with 19 Tray Sorter



# Four Configurations for Different Sizes of Labs and Workloads

# **AIA-900**

Benchtop

- 90 tests/hour throughput
- Load 10 racks on board
- Load up to 5 tests/patient

### **Dimensions - W/D/H:**

40" x 26.18" x 30" 1016 mm x 665 mm x 762 mm

# **AIA-900**

Loader Model

- 90 tests/hour throughput
- Load 10 racks on board
- Load up to 5 tests/patient

# **Dimensions - W/D/H:**

35.04" x 26.18" x 49.09" 890 mm x 665 mm x 1247 mm

# **AIA-900**

with 9 Tray Sorter

- 90 tests/hour throughput
- Load 9 trays (20 cups/tray)
- Load 10 sample racks
- Load 100 patient samples
- Increased walkaway time with loading 180 test cups

## **Dimensions - W/D/H:**

50.79" x 26.18" x 49.09" 1290 mm x 665 mm x 1247 mm

# **AIA-900**

with 19 Tray Sorter

- 90 tests/hour throughput
- Load 19 trays (20 cups/tray)
- Maximize walkaway time with loading 380 test cups
- Load 10 sample racks
- Load 100 patient samples

# **Dimensions - W/D/H:**

59.84" x 26.18" x 49.09" 1520 mm x 665 mm x 1247 mm

# Benchtop



Loader Model




9 tray sorter



19 tray sorter



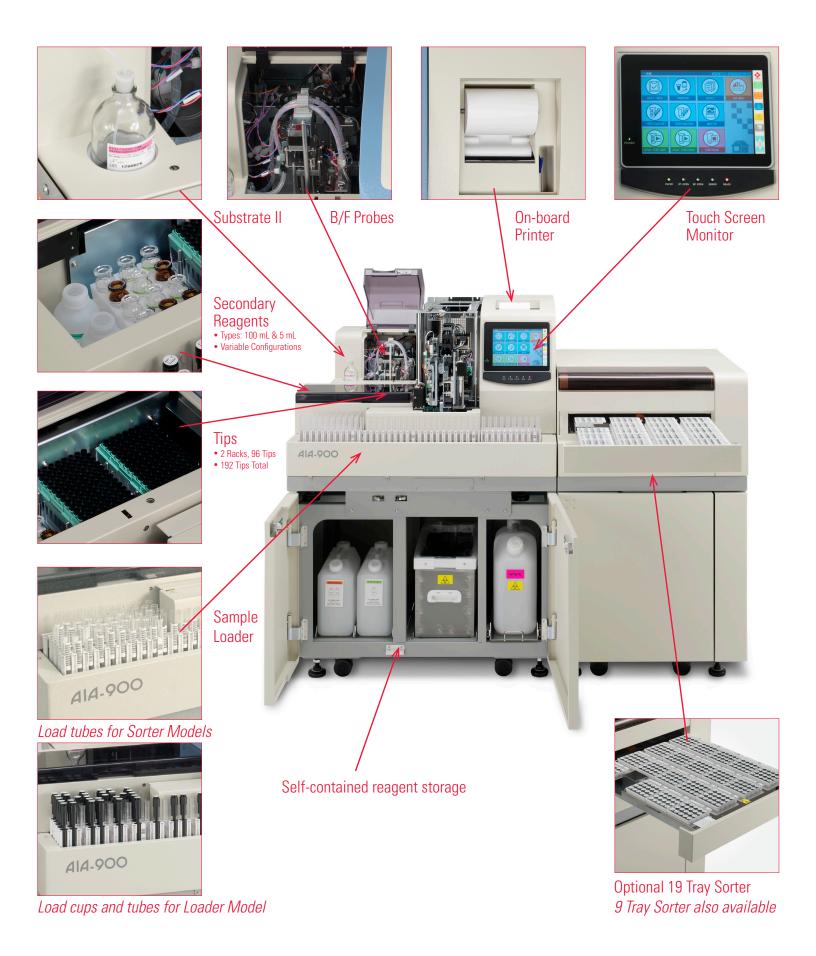

# **AIA**-900

# Automated Inventory Management Screens

# Test Cup Inventory



# Secondary Reagents



# **Changing Reagents**



# Unit Dose Test Cup Reagent Technology

The AIA-PACK® test cup format works with every Tosoh AIA Automated Immunoassay System. Reagents are interchangeable, so laboratories with more than one Tosoh system can use the same reagents. Transition between systems is seamless, ensuring consistent results and efficient, economical operation for the laboratory.

It is very easy for a lab to add a 9 or 19 tray sorter to the instrument. The reagent's performance does not change since the analysis section of the instrument remains unchanged.

# The AIA-900 requires minimal maintenance

# Daily Maintenance



# Weekly



# Monthly



# **AIA-900 Specifications**

Principle of measurement Fluorescent enzyme immunoassay (FEIA) method

Processing method Fully automated continuous random access

Processing ability Max. 90 tests/hour (ST reagent)

Specimen quantity 10 - 125 µL

Specimen clogging detection Pressure detection method

Measurement condition Reaction temperature: 37°C

Reaction time Antigen-antibody reaction time: 10 minutes, 20 minutes, 40 minutes

Specimen dilution function Dilution ratios between 2 and 1000 can be selected for each assay

Detection method Fluorescent measurement (top-top method)

Number of sample rack sets Max. 10

Number of samples and reagent cups Max. 100

Specimen containers  $13 \times 75$  mm,  $13 \times 100$  mm,  $16 \times 75$  mm,  $16 \times 100$  mm

(O.D. × length of test tube)

Dedicated sample cups

Specimen barcode Supports CODE39, CODE128, ITF, NW-7, JAN/EAN/UPC, industrial 2of5, and COOP2of5

Sample tip Dedicated tip

Number of installed sample tips Max. 192 tips (96 tips/rack in 2 racks)

Number of reagent sets Max. number of reagent vials: 12, Max. number of reagent bottles: 4

External output RS232C

Power source/consumption 100 - 240 VAC, 50/60 Hz, 300 VA

External dimensions AIA-900 Benchtop- W/D/H: (Dimensions include revolving carousel)

40" x 26.18" x 30"; 1016 mm x 665 mm x 762 mm

AIA-900 Loader Model - W/D/H: (Dimensions include analyzer/sorter stand)

35.04" x 26.18" x 49.09"; 890 mm x 665 mm x 1247 mm

AIA-900 with 9 Tray Sorter - W/D/H: (Dimensions include analyzer/sorter stand)

50.79" x 26.18" x 49.09"; 1290 mm x 665 mm x 1247 mm

AIA-900 with 19 Tray Sorter - W/D/H: (Dimensions include analyzer/sorter stand)

59.84" x 26.18" x 49.09"; 1520 mm x 665 mm x 1247 mm

Temperature 15 °C - 30 °C (degrees Celsius)

Humidity 40 % - 80 % R.H. (non-condensing)

EMC standard IEC61326-1: 2005, IEC61326-2-6: 2005



Tosoh Bioscience, Inc.

6000 Shoreline Court, Suite 101 South San Francisco, CA 94080

Tel: (800) 248-6764 Fax: (650) 615-0415

www.tosohbioscience.us